



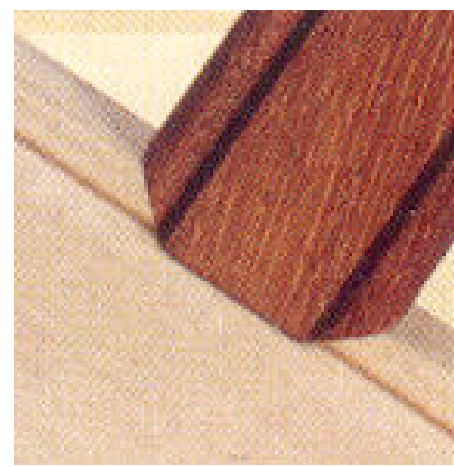

Quality- Service and Experience
since 1911



MORSØ-KS-MINI Router

pneumatic/electric



The perfect machine for producing the half-lap joint as found in Georgian window bars. It is used for both "plant-on cassettes" and rebated bars.

MORSØ-KS MINI routing machine is semi-automatic (pneumatic/electric)

MORSØ-KS MINI routing machine is constructed for routing of grooves from 6 - 26 mm wide and up to 20 mm deep. Quick adjustment from one size of nose width to another.

It is ideally used in conjunction with the MORSØ-N range of notch cutting machines.

Technical Data	
Machine Dimensions	
Length	660 mm
Width	460 mm
Total Machine Height	1200 mm
Height Stand	760 mm
Weight	49 kg
Pneumatics:	
Air Pressure	6 - 8 bar
Noise:	
Noise Level	70 dBA
Working Capacity:	
Max. Height of Work Piece	55 mm
Max. Width of Work Piece (with 10 mm cutter)	50 mm
Max. Groove Depth	20 mm
Max Groove Diameter	Ø 20 mm
Motor:	
Single Phase	0.860 kW
Rpm	29000

Distributor:

dan-list
MASKINFABRIK
Haraldsvej 21 - DK-8960 Randers - Denmark
Tel.: +45 8643 5105 - Fax: +45 8643 5103
e-mail: danlist@danlist.dk - www.danlist.dk